

ALV-C-2300RPZ




Features

- 1/3" 3Megapixel progressive CMOS sensor
- H.264 & MJPEG dual-stream encoding
- Max 20fps@3M(2048x1536)&25/30fps@1080P(1920 x1080)
- DWDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC
- Multiple network monitoring:
 - Web viewer
 - CMS(DSS/PSS)
 - DMSS
- 2.7~12mm varifocal lens
- Max IR LEDs Length 30m
- IP66, IK10, PoE

Specifications

CAMERA			
Image Sensor	1/3" 3Megapixel progressive scan CMOS sensor		
Effective Pixels	2048(H)x1536(V)		
Scanning System	Progressive		
Electronic Shutter Speed	Auto/Manual 1/3(4)~1/10000s		
Min. Illumination	Color: 0.01Lux/F1.4, 0Lux/F.14(IR on)		
S/N Ratio	More than 50dB		
Video Output	N/A		
CAMERA FEATURES			
Max. IR LEDs Length	30m		
Day/Night	Auto(ICR)/Color/B/W		
Backlight Compensation	BLC / HLC / DWDR		
White Balance	Auto/Manual		
Gain Control	Auto/Manual		
Noise Reduction	3D		
Privacy Masking	Up to 4 areas		
LENS			
Focal Length	2.7 -12mm	Max Aperture	F1.4
Focus Control	Auto	Angle of View	H: 92°~28°
Lens Type	Motorized/Fixed Iris(DC)	Mount Type	Board-in Type
VIDEO			
Compression	H.264/ H.264H/ MJPEG		
Resolution	3M(2048x1536)/1080P(1920x1080)/1.3M(1280x 960)/720P(1280x720)/D1(704x 576/704x 480)/CIF(352x 288/352x 240)		
Frame Rate	Main Stream	3M(1 ~ 20fps)/1080P (1 ~ 25/30fps)	
	Sub Stream	D1/CIF(1 ~ 25/30fps)	
Bit Rate	H.264H: 40K ~ 8192Kbps; MJPEG: 40K~16384Kbps		
AUDIO			
Compression	N/A		
Interface	N/A		
NETWORK			
Ethernet	RJ-45 (10/100Base-T)		
Protocol	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour		
Compatibility	ONVIF, PSIA, CGI		
Max. User Access	20 users		
Smart Phone	iPhone, iPad, Android, Windows Phone		
AUXILIARY INTERFACE			
Memory Slot	N/A		
RS485	N/A		
Alarm	N/A		
GENERAL			
Power Supply	DC12V, PoE(802.3af). Power consumption <8.5W		
Working Environment	-30°C~+60°C , Less than 95%RH		
Ingress Protection	IP66		
Vandal Resistance	IK10		
Dimensions	Φ122mm× 89mm, 0.5kg		

Dimension (unit:mm)

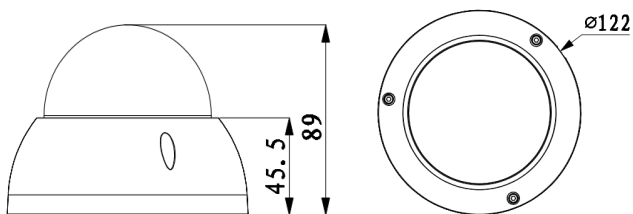

Distributor



P: 07 3451 9300 | P: 02 9450 6500 | P: 03 9200 6700 | P: 08 8243 7062
F: 07 3806 4794 | F: 02 9450 6586 | F: 03 9645 1422 | F: 08 8125 6559

www.iscs.com.au

Design and specifications are subject to change for product improvements without prior notice.