

ALV-C-CVI-2220R-Z




Features

- 1/2.8" 2.4Megapixel CMOS sensor
- 25/30fps@1080P, 25/30/50/60fps@720P
- High speed, long distance real-time transmission
- HD and standard definition switchable
- OSD Menu, control over coaxial cable
- DWDR, Day/Night(ICR), AWB, AGC, BLC, 3D-DNR
- 2.7~12mm motorized lens
- Max. IR LEDs length 60m, Smart IR
- IP67, DC12V

Specifications

Camera	
Image Sensor	1/2.8" 2.4Megapixel CMOS sensor
Effective Pixels	1984(H)×1225(V)
Electronic Shutter	1/3s~1/100,000s
Video Frame Rate	25/30/50/60fps@720P; 25/30fps@1080P
Synchronization	Internal
Min. Illumination	0.05Lux@F1.2(AGC on), Lux IR on
Video Output	1-channel BNC HDCVI high definition video output/CVBS standard definition video output (can switch)
Camera Features	
Max. IR LEDs Length	60m, Smart IR
Day/Night	Auto(ICR)/Color/B/W
Noise Reduction	2D/3D
OSD Menu	Support
Lens	
Focal Length	2.7 -12mm
Angle of View	H: 99°~34°
Lens Type	Manual/Fixed Iris
Mount Type	Φ14
General	
Power Supply	DC12V±20%
Power Consumption	Max 6.8W
Working Environment	-30°C~+60°C / Less than 95%RH (no condensation)
Transmission Distance	Over 500m via 75-3 coaxial cable
Ingress Protection	IP67
Dimensions	Φ122mm×102mm
Weight	0.55kg
Material	Metal

Dimension (unit:mm)

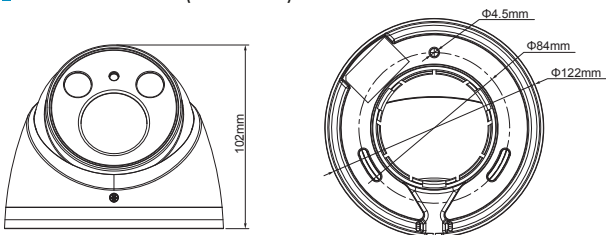

Optional Parts



ALV-C-PFA137
Water-proof Junction
Box



ALV-C-PFA152
Pole Mount Bracket



ALV-C-PFA203W
Water-proof Wall Mount
Bracket

Distributor



P: 07 3451 9300 | P: 02 9450 6500 | P: 03 9200 6700 | P: 08 8243 7062
F: 07 3806 4794 | F: 02 9450 6586 | F: 03 9645 1422 | F: 08 8125 6559

www.iscs.com.au

(*) Design and specifications are subject to change for product improvements without prior notice.