

## ALV-C-CVI-2220RPZ




### Features

- 1/2.8" 2.4Megapixel CMOS sensor
- 25/30fps@1080P, 25/30/50/60fps@720P
- High speed, long distance real-time transmission
- HD and standard definition switchable
- OSD Menu, control over coaxial cable
- DWDR, Day/Night(ICR), AWB, AGC, BLC, 3D-DNR
- 2.7~12mm motorized lens
- Max. IR LEDs length 30m, Smart IR

### Specifications

Camera	
Image Sensor	1/2.8" 2.4Megapixel CMOS sensor
Effective Pixels	1984(H)x1225(V)
Electronic Shutter	1/3s~1/100,000s
Video Frame Rate	25/30/50/60fps@720P; 25/30fps@1080P
Synchronization	Internal
Min. Illumination	0.05Lux@F1.2(AGC on)Lux IR on
Video Output	1-channel BNC HDCVI high definition video output/CVBS standard definition video output (can switch)
Camera Features	
Max. IR LEDs Length	30m, Smart IR
Day/Night	Auto(ICR)/Color/B/W
Noise Reduction	2D/3D
OSD Menu	Support
Lens	
Focal Length	2.7 -12mm
Angle of View	H: 105.5°~32.9°
Lens Type	Motorized/Fixed Iris
Mount Type	Φ14
General	
Power Supply	DC12V±10%
Power Consumption	Max 8.6W
Working Environment	-30°C~+60°C / Less than 95%RH (no condensation)
Transmission Distance	Over 500m via 75-3 coaxial cable
Ingress Protection	IP67 & IK10
Dimensions	Φ122mm× 89mm
Weight	0.45kg
Material	Metal

### Dimension (unit:mm)

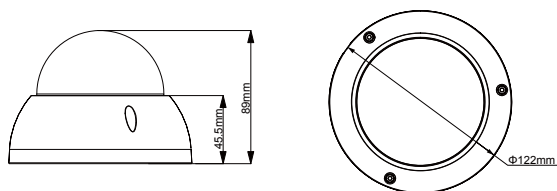

### Optional Parts



**ALV-C-PFB203W**  
Water-proof Wall Mount Bracket



**ALV-C-PFA137**  
Water-proof Junction Box



**ALV-C-PFA152**  
Pole Mount Bracket

### Distributor



P: 07 3451 9300 | P: 02 9450 6500 | P: 03 9200 6700 | P: 08 8243 7062  
F: 07 3806 4794 | F: 02 9450 6586 | F: 03 9645 1422 | F: 08 8125 6559

[www.iscs.com.au](http://www.iscs.com.au)

Design and specifications are subject to change for product improvements without prior notice.